




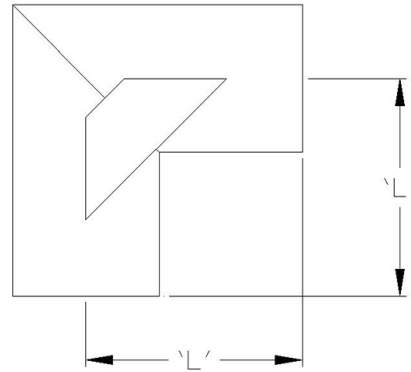


Elbow Specifications

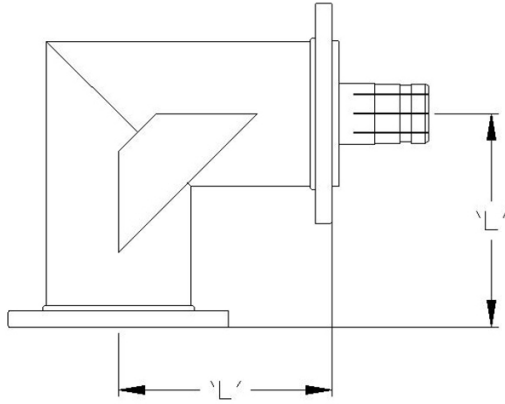

Part Number	Line Size	Impedance	Length (inches)	Approximate Weight (lbs)
780625	7/8"	50Ω	2 3/4"	1
150625	1 5/8"	50Ω	3"	2
350625	3 1/8"	50Ω	6"	8
450625	4 1/16"	50Ω	6"	12
650625	6 1/8"	50Ω	9"	21

Part Number	Line Size	Impedance	Length (inches)	Approximate Weight (lbs)
780627	7/8"	50Ω	2 3/4"	1
150627	1 5/8"	50Ω	2 7/8"	1 3/4
350627	3 1/8"	50Ω	5 13/16"	4
450627	4 1/16"	50Ω	5 13/16"	5
650627	6 1/8"	50Ω	8 3/4"	13

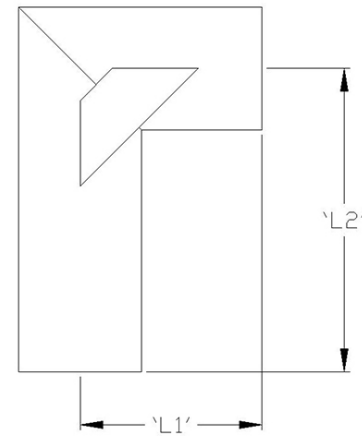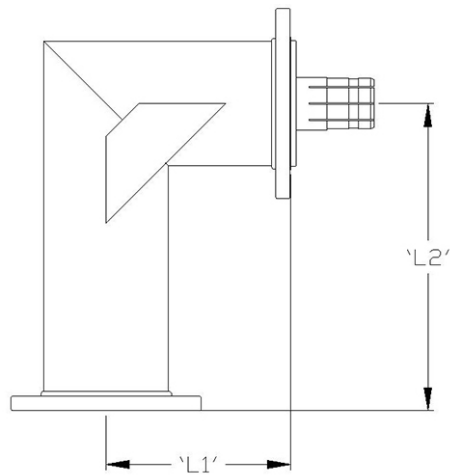

Part Number	Line Size	Impedance	L1 (inches)	L2 (inches)	Approximate Weight (lbs)
780626	7/8"	50Ω	2 7/16"	2 3/4"	1
150626	1 5/8"	50Ω	2 13/16"	5 13/16"	2
350626	3 1/8"	50Ω	6"	9"	12
450626	4 1/16"	50Ω	6"	9"	18
650626	6 1/8"	50Ω	9"	18"	50

Part Number	Line Size	Impedance	L1 (inches)	L2 (inches)	Approximate Weight (lbs)
780627A	7/8"	50Ω	2 7/16"	2 3/4"	0.5
150627A	1 5/8"	50Ω	2 13/16"	5 13/16"	1.5
350627A	3 1/8"	50Ω	6"	9"	6
450627A	4 1/16"	50Ω	6"	9"	9
650627A	6 1/8"	50Ω	9"	18"	21





Broadcast Antennas & Transmission Systems

**SYSTEMS WITH RELIABILITY, LP**

619 Industrial Park Road, Ebensburg, PA 15931

Phone 814.472.5436 Fax 814.472.5552 www.swr-rf.com

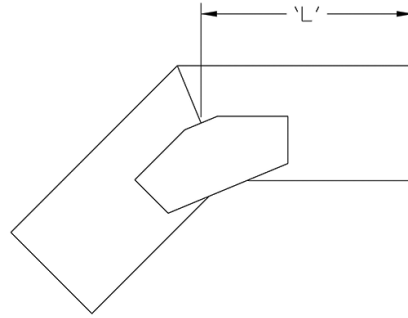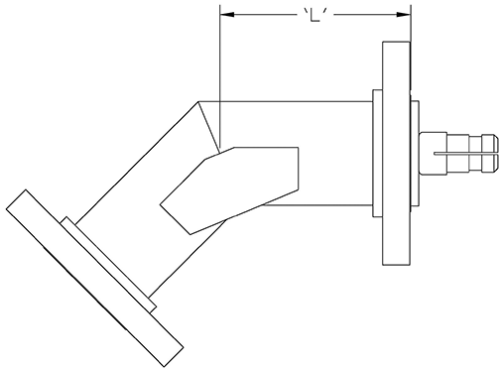

Part Number	Line Size	Impedance	Length (inches)	Approximate Weight (lbs)
150635	1 5/8"	50Ω	2.375"	3
350635	3 1/8"	50Ω	3.812"	7.88
450635	4 1/16"	50Ω	6"	16.5
650635	6 1/8"	50Ω	9"	26

Part Number	Line Size	Impedance	Length (inches)	Approximate Weight (lbs)
150635	1 5/8"	50Ω	2.375"	1
350635	3 1/8"	50Ω	3.812"	3.7
450635	4 1/16"	50Ω	6"	7.7
650635	6 1/8"	50Ω	9"	15